



CASE STUDY /

## **Parameter Identification and Analysis of Underground Laboratories**

The DBE Technology GmbH and Ansys performed an analysis of the Thermo-Hydro-Mechanical (THM) behavior of claystone in response to artificial heating for the exploration of underground laboratories.

### / Project Introduction

In search of suitable disposal sites for hazardous waste in underground laboratories, heating experiments are carried out to investigate thermal-hydraulic-mechanical interactions. In these experiments, the time depending changes of temperature, pore pressure and stress fields can be measured as a result of applying heat energy to rock formations. The DBE TECHNOLOGY GmbH developed, in collaboration with the Ansys simulation models which can be used to understand these interactions within the claystone formation. An important part of this development is the model calibration based on measurement results.

The heating experiment was simulated by the use of a Thermal-Hydraulic-Mechanical (THM) coupled, 3-dimensional finite element analysis with ANSYS and multiPlas. In this case, special routines for poroelasticity theories, thermal-hydraulic coupling and hydraulic-mechanical coupling were developed in isotropic or anisotropic claystone formations and implemented in Ansys. The optimization software optiSLang was used for the sensitivity analysis and the parameter identification. The complexity of the thermal-hydraulic-mechanical phenomena required a number of about 30 model parameters. Decisive conditions for the successful calibration between measurement and simulation of such a complex task are, on the one hand, high-performance algorithms and filtering strategies for coping with large parameter spaces available in optiSLang, and, on the other hand, the short calculation time achieved by using Ansys and multiPlas.

### / Project Aim

The aim of the computational analysis was the Thermal-Hydraulic-Mechanical (THM) coupled simulation of a heating experiment using a 3-dimensional simulation model. It should be proved that the THM interactions within the claystone can be simulated with reasonable accuracy and the simulation results can be compared with the available measurements. Using a sensitivity analysis, the essential interconnections between the measured end results and the input parameters should be identified.

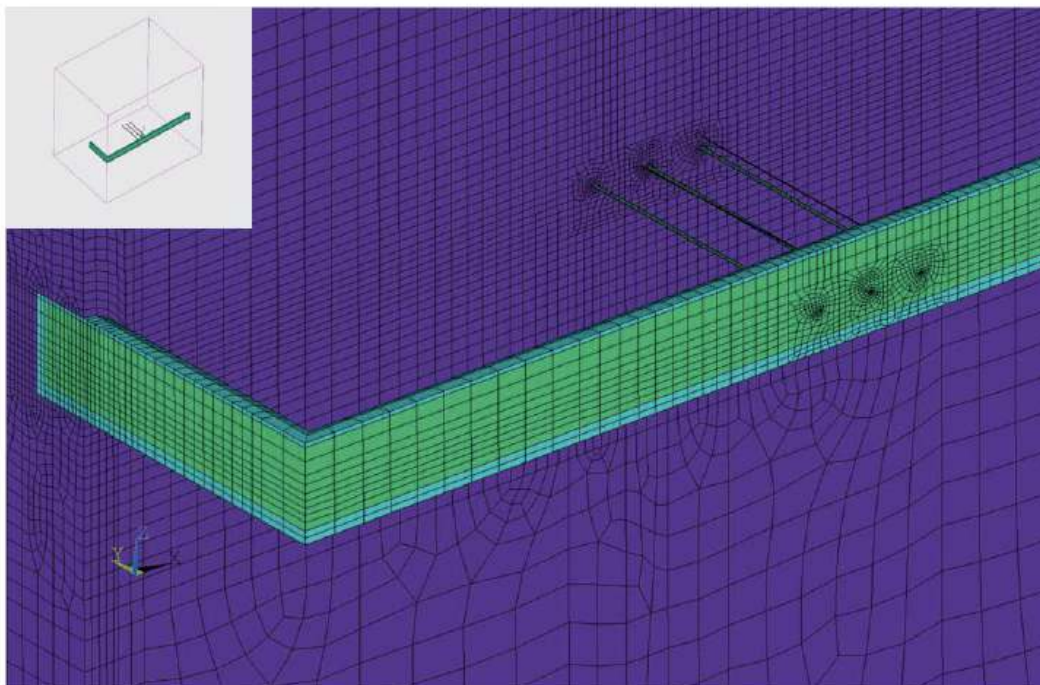


Figure 1: FE-mesh of structure, section.

## / Finite Element Simulation of Heating Experiments in Underground Laboratory

The heating experiment was simulated using a 3-dimensional finite element analysis (ANSYS and multiPlas). The initial state, i.e. the insitu stress, pore pressure and temperature conditions, was activated by means of initial material properties and boundary conditions. The excavation of the tunnel was simulated by deactivating the corresponding element areas. Here, the increase of permeability was included in the excavation-damage zone. Subsequently, a nonlinear coupled T-H-M finite element analysis of each heating period of the experiment was conducted. Figure 1 shows a section of the FE model.

The experiment was carried out in three periods with a corresponding increase of temperature output of the three heaters. Figure 2 shows the evolution of the three heating periods.

## / Modeling Strategy of the Claystone

An anisotropic material model containing the coupling of the isotropic Mohr-Coulomb model (rock matrix) and the anisotropic Mohr-Coulomb model (bedding plane) was generated with multiPlas and Ansys. This model was used for the continuum mechanical modeling of the claystone (Callovo-Oxfordian). The material model considers different behavior of the claystone in the pre and post damage zone. Using optiSLang, the FE model was parameterized.

## / T-H-M Coupled Calculation of the Heating Experiment

The simulation of the construction process (tunneling) was conducted in the mechanical analysis by deactivation and activation of the corresponding element areas. After deactivation of the claystone elements within the considered section, in a further step, the cladding elements of the tunnel were activated using the parameters of the shotcrete. The elements in the air and heater areas remained deactivated. The fracture sections were adapted to the FE mesh. For the thermal and hydraulic analyses, the construction process was considered analogously. Instead of activating and deactivating, the material properties of the respective elements of claystone to air and then air to shotcrete or heater were modified.

For the thermal-hydraulic-mechanical simulation, the following non-linear interactions between anisotropic thermal, hydraulic and mechanical material properties were considered:

- T-H coupling: the updating of the pore water pressure due to temperature changes and the temperature dependence of the hydraulic conductivity,
- T-M coupling: the influence of mechanical stress and deformation state by thermal expansion,
- H-M coupling: the updating the effective stress due to pore water pressure changes and
- M-H coupling: the dependence of the hydraulic conductivity in comparison to the stress state and the vector of plastic strains as well as the updating of the pore water pressures due to stress changes

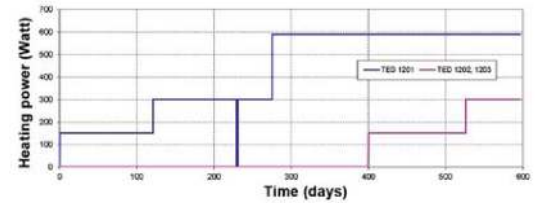


Figure 2: Periods of heating.

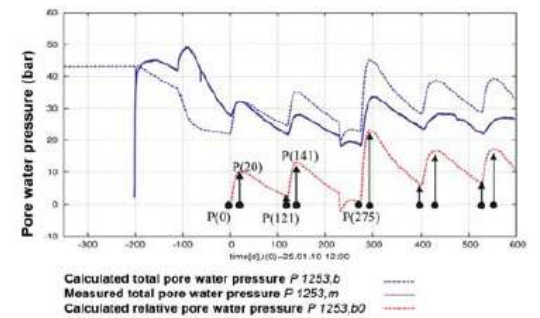


Figure 3: Relative pore water pressures for parameter identification.

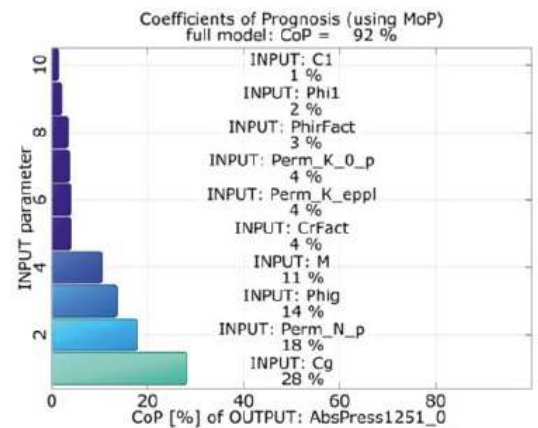


Figure 4: CoP relative pore pressure at time  $t = 0$ , the measuring point in 1251.

The change of the pore water pressure  $P$  is due to the changes of fluid volume, volumetric expansion and temperature. The hydraulic conductivity of the claystone is formulated as a function of temperature and the stress-strain state. Here, the anisotropic permeability is dependent on the stress state, the vector of the plastic strain and the orientation of the bedding plane.

## / Sensitivity Analysis

In the sensitivity analysis, the material parameters (including the parameters of the coupling dependencies) were varied within physically possible parameter limits. It should be investigated which of the material parameters have a relevant and physically understandable context for a comparison with the experimental results. For the analyzes, data of temperature and pore water pressure from a total of 17 measurement points were available. Due to the many uncertainties of the Tunnel excavation and the installation of the instruments, model calibration and parameter identification were limited to the heating experiment. Here, not the total pore water pressure but the pressure differentials and gradients as results of the heating and applied to the beginning of the heating periods were considered (see Figure 3 (see previous page)).

For the sensitivities evaluation of the relative pore water pressures, discrete values at certain times were used. The selection of these response variables made an evaluations of the sensitivity at the beginning and the end of the respective heating phases as well as at the time of reaching the maximum pore water pressure possible. Important results of the sensitivity analysis could be derived from the CoP values (Coefficient of Prognosis), which show the significance of the input parameters. In order to determine the CoP values, the MOP (Metamodel of Optimal Prognosis) is generated by optiSLang showing the best correlation between the variation of response variables and input variables. optiSLang filters out automatically unimportant input parameters. This strategy allows optiSLang, with a minimal number of designs, to identify efficiently the significant input parameters even in large parameter spaces. Thereby, also non-linear correlations are detected.

Figure 4 to Figure 6 are examples of the measurement point 1251 showing the CoP values of the input variables for the relative pore pressures at the times  $t = 0$  (start of heating),  $t = 20$  days (reaching the maximum pore water pressure) and  $t = 121$  days (end of the heating phase 1).

Evaluating the CoP values at all measuring points, it can be stated that at time  $t = 0$  (before start of heating), especially the following input variables influence the pore water pressure:

- Perm\_N\_p, Perm\_K\_0\_p - the permeability function of H-M coupling constants
- CG and phig - strength parameters (cohesion and friction angle) of the claystone
- M – Biot modulus

During the heating phases of the experiment especially the following input variables influence the pore water pressure:

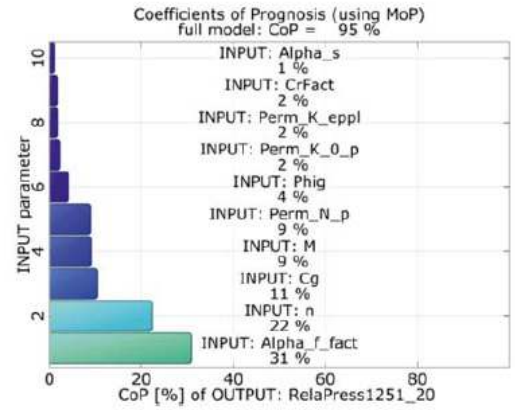


Figure 5: CoP relative pore pressure at time  $t = 20$  days, measurement point 1251.

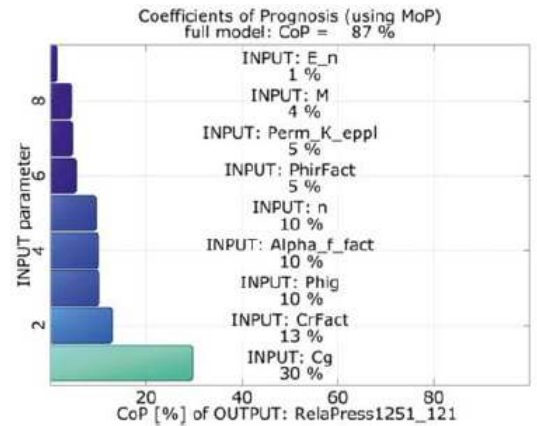


Figure 6: CoP relative pore pressure at time  $t = 121$  days, measurement point 1251.

- Alpha\_f\_fact - factor of the temperature-dependent volumetric expansion of the pore fluid (T-H coupling)
- n - porosity (T-H coupling)
- Perm\_N\_p, Perm\_K\_0\_p, Perm\_N\_n, Perm\_K\_0\_n - permeability function of the H-M coupling constants,
- CG and phig - strength parameters (cohesion and friction angle) of the claystone and
- M – Biot modulus

It can be seen that the pore water pressure increase at the beginning of each heating phase, is in particular influenced by the value Alpha\_f\_fact and n (values of the TH-coupling). The subsequent decrease of pore water pressure values, however, shows a significant correlation to the strength characteristics of the claystone (cg and Phig). This is an indication for the pore water pressure decline being particularly caused by stress redistribution, change of permeability and drainage effects. The high total CoP values of the individual response variables of > 85% emphasize the high plausibility of the main physical phenomena by the identified correlation. Furthermore, by comparing the scattering ranges of the calculated values with the time variations of the measurement results (see Figure 7), evaluations about the model quality and adjustability of the numerical model with the experimental results could be made. If the scattering range of the simulation model includes the measured evolution of parameters, a successful comparison within the selected parameter limits is possible. Figure 7 shows the correctness of this evaluation starting from the beginning of the experiment (t = 0).

## / Parameter Identification

Within the parameter identification, a set of input parameters is determined which simulates decently the time evolution of the measured and calculated temperatures and pore water pressures. Parameters not affecting the response variables in the sensitivity analysis were excluded from the parameter identification. They were taken into account with their reference values. Because the effects of initial disturbances (e.g. from tunnel excavation and installation of heating devices) decline in the course of the test, prognosis quality rises with each heating period. Therefore, the objective function for each heating periods were chosen with different priority factors (0.6 for heating period 1, 0.8 for heating period 2 and 1.0 for heating period 3). For the calibration of measurement and simulation, besides discrete values of the sensitivity analysis (see Figure 3), also the integral differences between the measured and calculated ranges were considered. For optimization, the adaptive response surface method being available in optiSLang was used. The comparison of the measured and calculated time signals of the temperatures and the relative pore water pressures (see Figure 8) shows the very accurate simulation of the used model concerning the observed physical phenomena (thermal-hydraulic and thermo-mechanical as well as thermo-plastic effects) in the heating experiment.

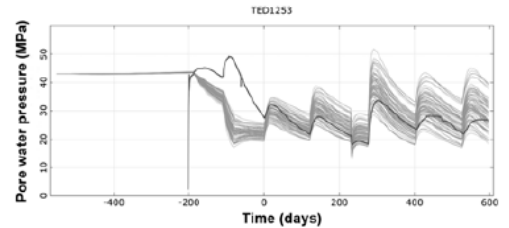


Figure 7: pore water pressure at the measurement point 1253 with a scattering range of the simulation model.

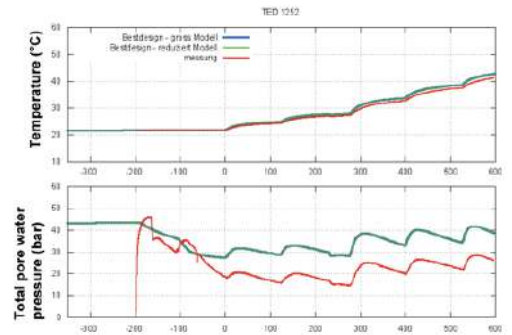


Figure 8a: Comparison of simulation vs. measurement at point 1252 after the parameter identification. Top: temperature curve, middle: total pore water pressure.

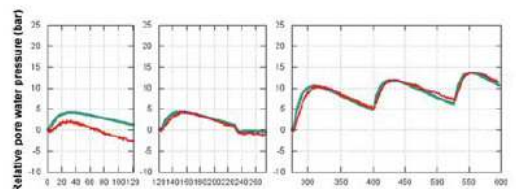


Figure 8b: Comparison of simulation vs. measurement at point 1252 after the parameter identification: Relative pore water pressure of the three heating periods.

## / Conclusions

Based on Ansys and multiPlas, an efficient THM-simulator was developed. The simulator computes a design completely from the tunnel excavation to the end of the third heating phase in only 32 hours on an ordinary PC workstation with two CPU. optiSlang's high-performance algorithms and filtering strategies for coping with large parameter spaces (advanced Latin Hypercube Sampling, Metamodel of Optimal Prognosis and Coefficient of Prognosis) enabled the efficient determination of significant input parameters and the evaluation of the main physical phenomena. The sensitivity analysis shows very accurately the following main influences affecting the pore water pressure before the start of the heating phase at time  $t = 0$ :

- hydraulic-mechanical effects, i.e. permeability due to the stress redistribution and plastic strains in the loosening zones of the tunnel excavation and heater drills
- changing of volumetric strain
- Biot modulus
- Changes of the pore water pressure after the beginning and during the course of the heating are significantly influenced by:
  - thermal-hydraulic coupling (strongest influence)
  - hydraulic-mechanical coupling, i.e. permeability due to stress redistribution, strength characteristics of the claystone and volumetric strain changes

Using powerful optimization algorithms in optiSlang, the most important parameters for T-H-M coupled simulations in claystone (Callovo-Oxfordian) could be successfully identified. The precise simulation results of the measured and calculated differences of pressures illustrated the accurate evaluation of both the rising of the heating gradient of the pore water pressure due to the start of each heating phases and the subsequent declining gradient. The used simulation model and the T-H-M coupling proved to be capable to explain the important thermal hydraulic effects (rising pore water pressure due to temperature increase) and thermo-mechanical effects (decrease of pore pressure due to changes of stress, drainage effects and plastic activities as well as related changes in the permeability).

There are plans to continue using the developed T-H-M simulator for future calculations or other identifications in the field of disposal sites research for hazardous waste in underground laboratories.

## / Authors

M. Jobmann, M. Polster, M. Breustedt

(DBE TECHNOLOGY GmbH) / R. Schlegel, P. Vymlatil, J. Will (Dynardo GmbH)

**ANSYS, Inc.**  
Southpointe  
2600 Ansys Drive  
Canonsburg, PA 15317  
U.S.A.  
724.746.3304  
ansysinfo@ansys.com

If you've ever seen a rocket launch, flown on an airplane, driven a car, used a computer, touched a mobile device, crossed a bridge or put on wearable technology, chances are you've used a product where Ansys software played a critical role in its creation. Ansys is the global leader in engineering simulation. We help the world's most innovative companies deliver radically better products to their customers. By offering the best and broadest portfolio of engineering simulation software, we help them solve the most complex design challenges and engineer products limited only by imagination.

**Visit [www.ansys.com](http://www.ansys.com) for more information.**

Any and all ANSYS, Inc. brand, product, service and feature names, logos and slogans are registered trademarks or trademarks of ANSYS, Inc. or its subsidiaries in the United States or other countries. All other brand, product, service and feature names or trademarks are the property of their respective owners.

© 2021 ANSYS, Inc. All Rights Reserved.